

Model GV-PVCCM


Venting Glass Curb Mount Skylight (Flat Roof)

Artistic Skylights conform to and exceed test requirements of the following criteria: AAMA/WDMA/CSA 101/I.S.2/A440-17 (NAFS - North American Fenestration Standard / Specification for windows, doors and skylights)

Skylights are suitable for use on all types of slope roofs. Designed for mounting on 1/2" (38mm) curbs with flashing (by others), these units provide excellent performance in all geographic locations.

- Flashing kits available for asphalt shingle roofs
- Custom sizes are available upon request
- Custom applications available

Model GV-PVCCM Available Sizes							
Model #	B x B Dimensions		S	Glazing	Glazing Type		QTY
GV-PVCCM 2828	22¼" x 22¼"	(565mm x 56	65mm)				
GV-PVCCM 2836	22¼" x 30¼"	⁴ x 30 ⁴ (565mm x 768mm)					
GV-PVCCM 2852	22¼" x 46¼"	x 46¼" (565mm x 1175mm)					
GV-PVCCM 2860	22¼" x 55"	2¼" x 55" (565mm x 1397mm)					
GV-PVCCM 2876	22¼" x 69½"	22¼" x 69½" (565mm x 1765mm)					
GV-PVCCM 3636	30¼" x 30¼" (768mm x 768mm)						
GV-PVCCM 3642	30¼" x 37" (768mm x 940mm)						
GV-PVCCM 3652		30¼" x 46¼" (768mm x 1175mm)					
GV-PVCCM 3660	30¼" x 55"	(768mm x 13	,				
GV-PVCCM 4242	37" x 37"	(940mm x 94	,				
GV-PVCCM 4252	37" x 46¼" (940mm x 1175mm)						
GV-PVCCM 5252	$46\frac{1}{4}$ " x $46\frac{1}{4}$ " (1175mm x 1175mm)						
GV-PVCCM CUST.	+0/4 X +0/4		1701111)				
GV-PVCCM CUST.							
			Available				
Glazing Available							
Glazing Type	Colo	Colour Code		Glazing Type		Colour Code	
Clear/Low-E	l	Low-E		Clear/Laminated		Lami.	
Bronze/Low-E	B,	B/Low-E		Argon/Low-E		Low-E/Arg	
Project:	I		1		1	_	
Contractor:			Annrov	ed By:			

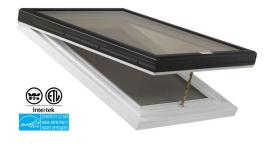

Specifications:


Skylight shall be factory assembled Model GV-PVCCM as manufactured by No. Artistic Skylight Domes Ltd. Vaughan, Ontario. Glazing shall consist of sealed double tempered glass of clear Low-E over clear. The skylight incorporates a heavy-duty corrosion resistant chain drive operating mechanism, pin pivot hinge system and removable insect screen. The skylight shall consist of a high-impact rigid extruded vinyl curb frame (superior in thermal conductivity to aluminum) which incorporates a high capacity, 10 degree sloped condensation gutter with drainage to the exterior, a co-extruded rubber draft seal and a white baked enamel extruded aluminum sash frame, alloy 6063-T5. The retaining cap frame shall be extruded, mill finish (optional baked enamel), 6063-T5 aluminum alloy with heliarc welded corners. An optional telescoping pole-hook or electric motorized system are available.

Architect:

Date:

Contractor:

Approved By:

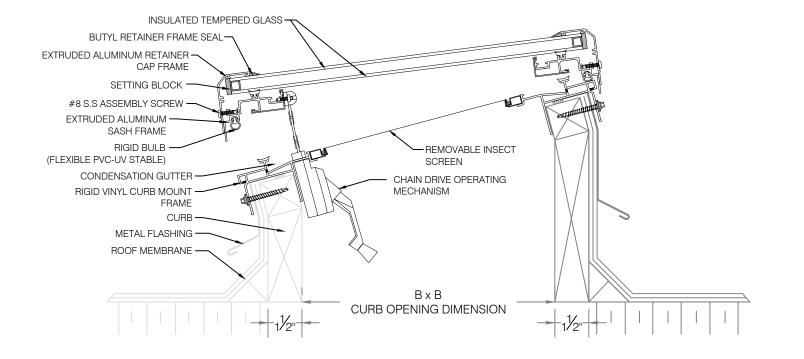

255 Regina Road, Vaughan, Ontario L4L 8M3 Tel: (416) 747-7233 or 1-866-878-DOME (3663) Fax: (416) 747-6630

Website: www.artisticskylight.com Email: artistic@artisticskylight.com artspec0916