

Frost-Free Commercial Dome (Polycarbonate) Curb Mount Skylight (Flat Roof)


Artistic Skylights conform to and exceed test requirements of the following criteria: AAMA/WDMA/CSA 101/I.S.2/A440-17 (NAFS - North American Fenestration Standard / Specification for windows, doors and skylights)

Skylights are suitable for use on all type roofs. Designed for mounting on 3" (76mm) to 8" (200mm) wide curbs with flashing (by others), these units are specifically designed for retrofit and/or new applications alike. They provide excellent performance in all geographic locations.

С

Custom sizes are available upon request

Model PC-FF Available Sizes							Specifications:
Model #	ВхЕ	B x B Dimensions		Dome Co	lour	QTY	Skylight shall be factory assembled Model
PC-FF 2020	14¼" x 14½	" (362mm x 362mr	n)				NoPC-FF as manufactured by Artistic
PC-FF 2052	14¼" x 46¼" (362mm x 1175mm)						Skylight Domes Ltd. Vaughan, Ontario. Glazing shall
PC-FF 2828	22¼" x 22¼" (565mm x 565mm)						consist of, sealed polycarbonate over acrylic domes
PC-FF 2836	22½" x 30½" (565mm x 768mm)						(or polycarbonate over polycarbonate) of clear or
PC-FF 2852	22¼" x 46¼" (565mm x 1175mm)						bronze. The skylight shall consist of corrosion resistan
PC-FF 2860		22½" x 55" (565mm x 1397mm) 22½" x 69½" (565mm x 1765mm) 22½" x 89½" (565mm x 2273mm)					extruded aluminum curb frame, 6063-T5 alloy, with heliarc welded corners. The skylight curb frame shall have an extruded rigid vinyl thermal break (to prevent
PC-FF 2876							
PC-FF 2896							
PC-FF 3636	30½" x 30½" (768mm x 768mm)						thermal transfer to interior of building) which incorporates a high capacity, 10 degree sloped condensation gutter with drainage to exterior, and co-extruded rubber bulb draft seal. The retaining cap
PC-FF 3642	30½" x 37" (768mm x 940mm)						
PC-FF 3652	30¼" x 46½	30¼" x 46¼" (768mm x 1175mm) 30¼" x 55" (768mm x 1397mm)					
PC-FF 3660							
PC-FF 3676	30¼" x 69½" (768mm x 1765mm)						
PC-FF 3696	30¼" x 89½" (768mm x 2273mm) 37" x 37" (940mm x 940mm)		,				frame shall be extruded, mill finish (optional baked enamel), 6063-T5 aluminum alloy with heliarc welded
PC-FF 4242			· —				
PC-FF 4252	37" x 46¼" (940mm x 1175mm)		· —				corners.
PC-FF 4280	37" x 75" (940mm x 1905mm)						
PC-FF 5252	,						Project:
PC-FF 5260	46¼" x 55" (1175mm x 1397mm)						
PC-FF 5276	46¼" x 69½" (1175mm x 1765mm)						
PC-FF 5280	46½" x 75" (1175mm x 1905mm)						Contractor
PC-FF 5296	46¼" x 89½" (1175mm x 2273mm)						Contractor:
PC-FF 6060	55" x 55" (1397mm x 1397mm)						
PC-FF 6076	55" x 69½" (1397mm x 1765mm)						
PC-FF 6096	55" x 89½" (1397mm x 2273mm)						Architect:
PC-FF 7272	67" x 67" (1702mm x 1702mm)						Architect.
PC-FF 7296	67" x 89½" (1702mm x 2273mm)						
PC-FF CUST.							
PC-FF CUST.					Approved By:		
Dome Colours Available						, ipprovod by.	
Dome Co	olour	Colour Code D		me Colour		our Code	Date:

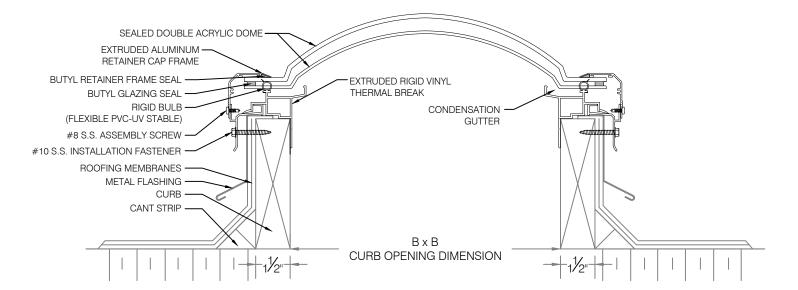

В

Bronze

Clear